

|                      |   |
|----------------------|---|
| <b>JAVELIN 8600E</b> | an entry level thermal platesetter where price over productivity is more important. |
| <b>JAVELIN 8600S</b> | a faster, more productive on-site upgrade from the JavelinE                         |
| <b>JAVELIN 8600Z</b> | all the speed and productivity of the JavelinS, with additional resolution options  |



## Javelin 8600E/S/Z

Luxe! T-9500 CTP

**EXTERNAL DRUM**  
*thermal platesetters featuring  
 quality and consistency.*

Why is thermal computer-to-plate technology the system of choice for so many successful companies? There's no doubt about thermal CTP's reliable high-quality output. It is unrivaled for its superb sharp dots. Whenever quality is crucial, the natural choice is thermal. Its consistency for long run lengths and easy daylight handling are also important for many printers. And the bottom line is always about keeping the presses running.

The Javelin 8600 Series features state-of-the-art thermal CTP recorders and they deliver the versatility and productivity you need to keep your presses running. With the optional Javelin single cassette or multi cassette autoloader, users can enjoy hundreds of plates being imaged without operator intervention and hours of unattended operation.

All offer optional inline plate punching for perfect on-press register and faster makeready times, as well as our acclaimed autoloader options for unattended plate loading. If you like the idea of running your pressroom at full capacity, you'll love the Javelin 8600 Series.

### Javelin 8600E/S/Z Features:

- Unrivaled print quality
- Advanced external drum design
- Suitable for a wide range of plate sizes
- Intelligent auto-balance system
- Automatic inline punch system
- Productivity upgrade option (8600E to 8600S)
- Single cassette and multi-cassette autoloader options
- Fujifilm Co-Res and TAFFETA screening options available


## UNRIVALED PRINT QUALITY

The Javelin 8600S and 8600Z features a 64-channel light source and, combined with a high speed rotating drum, provides output up to 22 plates per hour. For a more economical choice, the Javelin 8600E utilizes a 32-channel light source and is capable of outputting up to 14 plates per hour.

Experience the exceptional screening reproduction that only thermal plate recorders can deliver: there are three advanced models to suit all of your production requirements.

## PRODUCTIVITY UPGRADE


To meet your expanding production requirements, we have made it easy to upgrade the Javelin 8600E to the 8600S by simply replacing certain key parts. This can be done on-site and eliminates excess costs and increases operating efficiency.

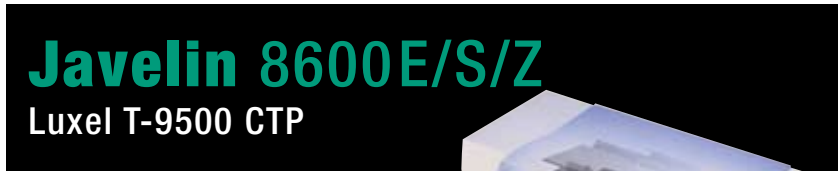

## ADVANCED EXTERNAL DRUM DESIGN

The thermal Javelin 8600 series is constructed with a reliable external drum design. This makes it possible for the drum to spin at high speeds with the imaging head positioned close to the surface of the plate. Easy maintenance of the imaging head is another key advantage of this design. Individual laser diodes can be replaced as required.

## INLINE PUNCHING SYSTEM INCREASES REGISTRATION ACCURACY



The Javelin 8600 Series features an automatic inline punching system that helps enable perfect register on press. Plates are punched immediately before loading on to the drum. Holes punched in the plates line up perfectly with registration pins on the drum, ensuring that the plates are always in the same position irrespective of plate size and squareness. This results in extremely high registration accuracy.

By adding optional press punch blocks (up to 8 punch blocks can be mounted and selected according to plate sizes and press types), imaged plates can be loaded straight on to the press. This eliminates any further manual steps, ensures high registration accuracy and creates the foundation for perfect results on press. The whole process shortens press makeready time dramatically and tremendously improves the efficiency of the whole operation.

## AUTOLOADER OPTIONS

The SAL single cassette autoloader can hold up to 100 plates with automatic interleaf paper removal. The MAL multi-cassette autoloader comes standard with three cassettes, each holding 100 plates with automatic interleaf removal. Two additional MAL cassettes are available as an option, which allows for five cassettes on-line making it possible to image 500 plates of five different sizes without operator intervention.



## THE FUJIFILM GREEN POLICY

We at Fujifilm believe that "sustainable development" of the Earth, mankind, and companies in the 21st century is an issue that must be addressed with the highest priority. As a socially responsible corporation, we actively undertake corporate activities with our environmental values in mind. We strive to be a dedicated steward of the environment and assist our customers and corporate partners in doing the same.



FUJIFILM group  
Green Policy

## SPECIFICATIONS:

### COMMON TO JAVELIN SERIES

**RECORDING SYSTEM**  
• External drum

**REPEATABILITY**  
• ±5 microns (±0.2mil.)\*

**PLATE SIZE\*1**  
• Maximum: 45<sup>21</sup>/<sub>32</sub>" x 37"  
(1,160 mm x 940 mm)  
• Minimum: 12" x 14<sup>9</sup>/<sub>16</sub>"  
(304 mm x 370 mm)

**EXPOSURE SIZE\*2**  
• Maximum: 45<sup>21</sup>/<sub>32</sub>" x 36<sup>3</sup>/<sub>8</sub>"  
(1,160 mm x 924 mm)  
• Minimum: 12" x 14"  
(304 mm x 354 mm)

**MEDIA**  
• Thermal (infrared sensitive) plates

**MEDIA THICKNESS**  
• 6 to 12 gauge (0.15 to 0.3 mm)  
• 16 gauge factory option

**INTERFACE**  
• Fast PIF

### AUTOLOADERS\*3

**SAL**  
• 100 plate capacity

**MAL**  
• 100 plate capacity per cassette  
• 3 cassette standard  
• 5 cassettes maximum

### OPTIONS

• Punching-Heidelberg, Komori, and others  
• Javelin 8600E to 8600S upgrade

### ENVIRONMENT

• Recommended: 70°F – 77°F  
• 40% to 70% relative humidity (non-condensing)

### DIMENSIONS

• Main unit:  
96.1"W x 51"D x 51.3"H  
(engine only)

### POWER REQUIREMENTS

• Single phase 200-240V, 32A, 4.0kW

**WEIGHT**  
• 2,530 lbs.

\* Over four consecutive exposures on one plate at 73.4°F and 60% relative humidity.

\*1 The Registration Punch Option is required for a plate width (across the drum) dimension between 23<sup>7</sup>/<sub>32</sub>" x 24" (590 mm – 610 mm).

\*2 Use of the 8mm clamps results in a 16mm reduction of exposure size. Use of the 12mm clamps results in a 24mm reduction of exposure size. Maximum drum speed of 600 rpm for 8mm clamps or for plates smaller than 650mm x 550mm (25<sup>9</sup>/<sub>16</sub>" x 21<sup>5</sup>/<sub>8</sub>").

### SPECIFIC TO JAVELIN 8600E

**RESOLUTIONS**  
• 1200 dpi  
• 2400 dpi  
• 2438 dpi  
• 2540 dpi

**LIGHT SOURCE**  
• 32 channel infrared laser diodes

### IMAGING TIME

• 14 plates per hour @2400 dpi\*4  
40.5" x 31.4" (LH-PJ)  
(1030 mm x 800 mm plate)

### SPECIFIC TO JAVELIN 8600S

**RESOLUTIONS**  
• 1200 dpi  
• 2400 dpi  
• 2438 dpi  
• 2540 dpi

**LIGHT SOURCE**  
• 64 channel infrared laser diodes

### IMAGING TIMES

• 22 plates per hour @2400 dpi\*4  
40.5" x 31.4" (LH-PJ)  
(1030 mm x 800 mm plate)

### SPECIFIC TO JAVELIN 8600Z

**RESOLUTIONS**  
• 1200 dpi  
• 2000 dpi  
• 2400 dpi  
• 2438 dpi  
• 2540 dpi  
• 4000 dpi

**LIGHT SOURCE**  
• 64 channel infrared laser diodes

### IMAGING TIME

• 22 plates per hour @2400 dpi\*4  
40.5" x 31.4" (LH-PJ)  
(1030 mm x 800 mm plate)

\*3 Autoloaders (SAL/MAL) support a minimum plate size of 17<sup>1</sup>/<sub>16</sub>" x 14<sup>9</sup>/<sub>16</sub>" (450 x 370). The SPK (small plate kit) option for the SAL/MAL and T-9001 Conveyor is required to support minimum plate sizes of 12" x 14<sup>9</sup>/<sub>16</sub>" – 17<sup>1</sup>/<sub>16</sub>" x 14<sup>9</sup>/<sub>16</sub>" (304 x 370 – 450 x 370).

\*4 May vary depending on the sensitivity of the media and selected plate clamp.

**FUJIFILM**

javelin8600ESZ\_081001